

Aii 2000 Series Oxygen Monitor

Technical Specifications

Accuracy:	< ±1% of FS range under constant conditions
Analysis:	0-100% oxygen
Application:	Anesthesia Respiratory Therapy - Ventilators, Respirators Neonatal & Pediatric Incubators & Hoods Oxygen Therapy - Intensive Care Emergency Transport
Approvals:	ISO 9001:2000, MDD 93/42/Annex II, ISO 13485:2003
Area Classification:	General purpose
Alarms:	User adjustable HI alarm 16-100% and LO alarm 15-99%; 120 second alarm silence for calibration purposes HI alarm defeat for flushing patients with 100% O ₂
Calibration:	Air or certified 100% O ₂ every 8 hours; time - 90 seconds
Compensation:	Temperature compensated
Connections:	1x16 mm thread or push-in flow diverter with o-ring seal
Controls:	Soft touch keypad for ON/OFF and menu function
Dimensions:	3.6 x 5.9 x 1.6"; weight 10 oz. (280 grams)
Display:	3-1/2 digit backlit LCD 2.75 x 1.375; resolution 0.1% O ₂
Flow Sensitivity:	None between 0.2 to 10 liters per minute
Humidity:	Non-condensing 0-95% RH
LED Indicators:	Activation of alarm condition(s)
Linearity:	± 1% under constant conditions
Pressure:	Inlet - ambient; vent - atmospheric
Power:	2 AA Alkaline batteries; 1,200 hours continuous use
Response Time:	90% of final FS reading in 9 seconds
Sensitivity:	< 0.5% of FS range
Sensor:	Aii-11-60
Sensor Life:	60 months in air at 25°C and 1 atmosphere
Signal Output:	None
Storage Temp.:	-20° to 60°C (-4°F to 140°F) on intermittent basis
Temp. Range:	5° to 45°C (41°F to 113°F)
Warm-up Time:	None
Warranty:	24 months analyzer; 18 months sensor (any application)

Optional Equipment

- FITN-1009 Tee adapter (P/N FITN-1009)
- HRWR-1075 Dovetail Pole/Shelf Clamp
- CC-1072 Carrying Case



**Aii-2000 M
Oxygen Monitor**

Advanced Sensor Technology

60 Month Life in Air

Fast Response - 9 Seconds

18 Month Warranty

No Maintenance

State of the Art Electronics

Auto Diagnostics


Alarms: LO 15-99%, HI 16-100%

Large Backlit LCD Display

Intuitive Interface

Integral Tripod and Pole Bracket



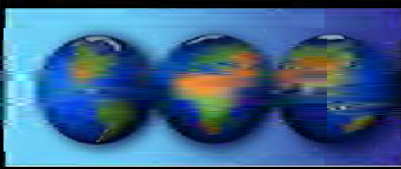

AII 2000 Series Oxygen Analyzers

Technical Specifications

Accuracy:	< ±1% of FS range under constant conditions
Analysis:	0-100% oxygen
Application:	Anesthesia Respiratory Therapy - Ventilators, Respirators Neonatal & Pediatric Incubators & Hoods Oxygen Therapy - Intensive Care Emergency Transport
Approvals:	ISO 9001:2000, MDD 93/42/Annex II, ISO 13485:2003
Area Classification:	General purpose
Alarms:	None
Calibration:	Air or certified 100% O ₂ every 8 hours; time - 90 seconds
Compensation:	Temperature compensated
Connections:	1x16 mm thread or push-in flow diverter with o-ring seal
Controls:	Soft touch keypad for ON/OFF and menu function
Dimensions:	3.6 x 5.9 x 1.6"; weight 10 oz. (280 grams)
Display:	3-1/2 digit backlit LCD 2.75 x 1.375; resolution 0.1% O ₂
Flow Sensitivity:	None between 0.2 to 10 liters per minute
Humidity:	Non-condensing 0-95% RH
LED Indicators:	None
Linearity:	± 1% under constant conditions
Pressure:	Inlet - ambient; vent - atmospheric
Power:	2 AA Alkaline batteries; 1,200 hours continuous use
Response Time:	90% of final FS reading in 9 seconds
Sensitivity:	< 0.5% of FS range
Sensor:	AII-11-60 (A/M models) or AII-11-60-HC (HC model)
Sensor Life:	60 months in air at 25°C and 1 atmosphere
Signal Output:	None
Storage Temp.:	-20° to 60°C (-4°F to 140°F) on intermittent basis
Temp. Range:	5° to 45°C (41°F to 113°F)
Warm-up Time:	None
Warranty:	24 months analyzer; 18 months sensor (any application)



**AII-2000 A
Oxygen Analyzer**



**AII-2000 HC
Oxygen Analyzer**

Optional Equipment

- FITN-1009 Tee Adapter
- HRWR-1075 Dovetail Pole/Shelf Clamp
- CC-1072 Carrying Case

