

# Oxygen Pressure Regulators

## *Built to Last in the Rugged Emergency Environment*



L270-220

The Life Support Products series of all-brass body oxygen pressure regulators provides enhanced safety features and a greater number of flow selections for the EMS professional.

The uni-body construction is designed to strengthen the regulator, minimize potential leak paths, and prevent breakage of the yoke cylinder connection assembly. For additional safety, inlet filters provide gas filtration down to 20 microns. Standard LSP regulators have a 5-year warranty.

LSP regulators offer 12 flow positions ... more flow selections than ever before. Equipped with up to two DISS check valves, LSP regulators provide regulated pressure and flow for the operation of two demand valves, or one demand valve and one aspirator, or any pneumatically-powered ventilator. A DISS or hose barb adjustable flow outlet permits attachment of a disposable mask, cannula, or bag mask device. All three outlet configurations may be operated simultaneously.

The Rhino™ oxygen regulator is virtually unbreakable. This oxygen pressure regulator features an all-brass uni-body construction designed to strengthen the regulator, prevent yoke damage and regulator leakage, and protect the flow selector knob from accidental adjustment. The Rhino regulator also has a unique integrated aluminum shroud and lens cover that shelters the gauge from breakage and contamination, and is available in a choice of five colors.

A 20 micron sintered bronze gas inlet filter provides gas filtration and additional protection against contamination. Rhino regulators are available with up to two male DISS oxygen check valves and different flow ranges delivered through a hose barb outlet. The Rhino regulator has a 10-year warranty.



L370-220-R

### Key Features

- Uni-body construction designed to prevent yoke breakage and regulator leakage, and provide complete protection to the constant flow selector knob
- Nickel-plated brass body is fire resistant and able to withstand corrosive materials, the marine environment, and harsh weather conditions
- Sintered bronze high-pressure inlet filter for enhanced protection against contamination
- Compact break-resistant low profile contents gauge
- Large easy to read flow rate numbers
- Two body designs: yoke inlet for small cylinders, and nut and nipple inlet for large cylinders
- Hose barb or DISS outlet connection for oxygen supply to patient
- 10-year warranty on Rhino regulators, with patented protective shroud

# Oxygen Pressure Regulators



L270-250



L270-220



L106-260



L280-220



L370-220-R

## SPECIFICATIONS

**Supply Pressure:** 500 to 2200 psi

**Outlet Pressure:** High flow outlets: 40 to 60 psi at 500 to 2200 psi inlet pressure

**Flow Capacity:** High flow outlets: 125 lpm minimum single or combined flow with 500 psi inlet pressure

Constant flow outlet selections:

0-15 lpm: 0, .5, 1, 1.5, 2, 3, 4, 5, 6, 8, 10, 15

0-25 lpm: 0, .5, 1, 2, 4, 6, 8, 10, 12, 15, 20, 25

**Filter:** 25 micron sintered bronze

**Safety Relief Pressure:** 75-125 psi

**Operating Temperature:** -30° F to 125° F

**Storage Temperature:** -20° F to 120° F

**Materials:** Body - nickel-plated brass; knob - anodized aluminum; outlets - nickel-plated brass; internal parts - brass, stainless steel, Viton®, silicon, and Teflon®

All LSP brass oxygen regulators are laser-engraved with the LSP logo, model number, date code and bar code to assist in preventing loss and tracking for routine maintenance.

## ORDERING INFORMATION

### Yoke Pin Indexed CGA 870 Regulators

L270-230 0-15 lpm, with gauge, 2 check valves, hose barb outlet

L270-260 0-15 lpm, with gauge, hose barb outlet

L270-220 0-25 lpm, with gauge, 2 check valves, hose barb outlet

L270-220-CE 0-25 lpm, with gauge, 2 check valves, hose barb outlet

L270-250 0-25 lpm, with gauge, hose barb outlet

L370-220\* 0-25 lpm, with gauge, 2 check valves, hose barb outlet

L370-250\* 0-25 lpm, with gauge, hose barb outlet

### DISS Fitting CGA 540 Regulators

L106-260 Fixed flow, with gauge, 2 check valves

L280-220 0-25 lpm, with gauge, 2 check valves, hose barb outlet



L270-220-CE



**EMERGO EUROPE**  
Molenstraat 15  
2513 BH, The Hague  
The Netherlands

\*Rhino™ Regulators: Add color choice to the model number for your choice of gauge shroud color.  
A = Aluminum, B = Blue, G = Green, R = Red, GL = Gold.  
Example: L370-220-R

**Additional models are available. For information about our complete line of oxygen regulators, contact an Allied healthcare Products Customer Service Representative.**



Allied Healthcare Products, Inc. ▪ 1720 Sublette Avenue ▪ St. Louis, MO 63110 USA  
314/771-2400 ▪ 800/444-3954 ▪ FAX: 314/771-0650 ▪ www.alliedhpi.com

U.S.  
Toll Free: 800/444-3940  
FAX: 800/477-7701

Canada & Mexico  
Toll Free: 800/446-0552  
FAX: 800/246-6201

International  
Telephone: 314/268-1683  
FAX: 314/771-5183


**ISO 13485: 2003**

©Allied Healthcare Products, Inc.®


All specifications are nominal and subject to change without notice.

Form 90-00-0002  
Rev. January 2014

# B&F Oxygen Pressure Regulators

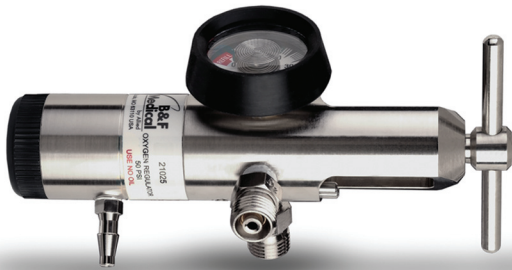

21025

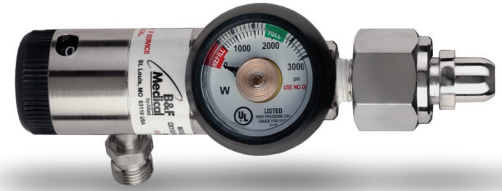

23002



21017

## B&F Brass Oxygen Regulators ... For Quality That Costs Less!

Allied Healthcare offers a wide range of oxygen regulators in the B&F line that will suit most homecare, hospital and emergency situations.

B&F oxygen regulators offer an array of options, such as an easy to read flow rate window and a dial-in click-style flow controller ... making operation convenient for the variety of users. B&F oxygen regulators are available with or without a hose barb outlet ... with or without a DISS outlet ... and with a one-year manufacturer's warranty.

### FEATURES

- Uni-body construction designed to strengthen the regulator and prevent breakage.
- Nickel-plated brass body for safe use in oxygen service.
- Two body designs: Yoke inlet for small cylinders, nut and nipple inlet for large cylinders.
- Compact, 1-1/2" diameter low-profile contents gauge with gauge protector.
- Serrated dial-in flow control knob for ease of flow rate selection.
- Large easy to read flow rate numbers.
- Hose barb or DISS outlet provide secure connection of oxygen supply line to patient.



## SPECIFICATIONS

<b>Supply Pressure:</b>	500 to 2200 psi
<b>Outlet Pressure:</b>	High flow outlets: 40 to 60 psi at 500 to 2200 psi inlet pressure
<b>Flow Capacity:</b>	High flow outlets: 100 lpm minimum single or combined flow with 500 psi inlet pressure Constant flow outlet selections: 0-6 lpm: 0, .125, .25, .5, .75, 1, 1.5, 2, 3, 4, 5, 6 0-8 lpm: 0, .5, 1, 1.5, 2, 2.5, 3, 4, 5, 6, 7, 8 0-15 lpm: 0, .5, 1, 1.5, 2, 3, 4, 5, 6, 8, 10, 15 0-25 lpm: 0, 1, 2, 4, 6, 8, 10, 12, 15, 18, 20, 25
<b>Filter:</b>	50 micron sintered bronze
<b>Safety Relief Pressure:</b>	75-140 psi
<b>Operating Temperature:</b>	32° F to 100° F
<b>Storage Temperature:</b>	-20° F to 120° F
<b>Materials:</b>	Body: Brass Knob: Acetal plastic Outlets: Nickel-plated brass Internal parts: Brass, stainless steel, Viton®, silicon and Teflon®

## ORDERING INFORMATION

### Yoke Pin Indexed CGA 870 Model Regulators

#### Homecare and Hospital:

<b>21020</b>	0-6 lpm, hose barb outlet, with gauge
<b>22020</b>	0-6 lpm, DISS outlet, with gauge
<b>21004</b>	0-8 lpm, hose barb outlet, without gauge
<b>21014</b>	0-8 lpm, hose barb outlet, with gauge
<b>23014</b>	0-8 lpm, DISS outlet, with gauge
<b>21007</b>	0-15 lpm, hose barb outlet, without gauge
<b>21017</b>	0-15 lpm, hose barb outlet, with gauge
<b>23017</b>	0-15 lpm, DISS outlet, with gauge
<b>21030</b>	0-25 lpm, hose barb outlet, with gauge
<b>21031</b>	0-25 lpm, DISS outlet, with gauge

#### EMS:

<b>21012</b>	0-15 lpm, 2 check valves, hose barb outlet, with gauge
<b>24017</b>	0-15 lpm, 1 check valve, hose barb outlet, with gauge
<b>21002</b>	0-25 lpm, 2 check valves, hose barb outlets, without gauge
<b>21025</b>	0-25 lpm, 2 check valves, hose barb outlet, with gauge
<b>21032</b>	0-25 lpm, 1 check valve, hose barb outlet, with gauge

### DISS Fitting CGA 540 Model Regulators

#### Homecare and Hospital:

<b>23020</b>	0-6 lpm, hose barb outlet, with gauge
<b>23002</b>	0-8 lpm, DISS outlet, with gauge
<b>23003</b>	0-15 lpm, DISS outlet, with gauge
<b>EMS:</b>	
<b>23004</b>	0-15 lpm, 1 check valve, hose barb outlet, with gauge
<b>23006</b>	0-15 lpm, 2 check valves, hose barb outlet, with gauge
<b>23025-G</b>	0-25 lpm, 2 check valves, hose barb outlet, with gauge

**Additional models are available. For information about our complete line of oxygen regulators for homecare, hospital and emergency care, contact an Allied Healthcare Products Customer Service Representative.**



**ISO 9001  
CERTIFIED**

Allied Healthcare Products, Inc. • 1720 Sublette Avenue • St. Louis, Missouri 63110  
314/771-2400 • 800/444-3954 • Fax: 314/771-0650 • www.alliedhpi.com  
International offices in Europe, Asia, and South America

U.S.

Toll Free: 800/444-3940  
Fax: 800/477-7701

©Allied Healthcare Products, Inc.

Canada & Mexico

Toll Free: 800/446-0552  
Fax: 800/246-6201

International

Telephone: 314/268-1683  
Fax: 314/771-5183

Form No. 70-00-0005 8/04