


## MACHINE ROBOTIC TORCHES

### Largest Line of Machine Robotic Torches

- All torches are back-loaded, no need to remove cup to make adjustments
- Adjust tungsten up to 3/4" (19mm) without removing tungsten from torch (MT100, MT400)
- Adjustable backcap allows AVC adjustment while welding
- Uses standard 10N Series cup and collet body, 10N "stubby" collet
- High temperature phenolic resin insulation

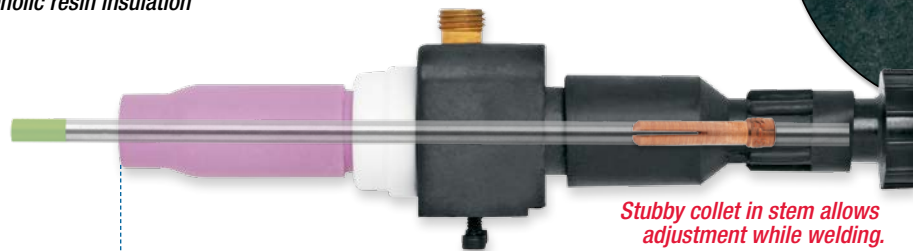

5.75" (14.6cm)

See Stubby 4 Series slotted collets on page 58.



3.75" (9.5cm)

## COMPACT SERIES TORCHES

### MT100 GAS-COOLED

MT100 MACHINE TORCH <i>CK EXCLUSIVE</i>				
HEAD STYLE	CABLE	LENGTH	STANDARD #	SUPERFLEX #
Face Plate Mounted	1 Piece	12½ ft. (3.8m)	MT112	MT112SF
		25 ft. (7.6m)	MT125	MT125SF

- Gas-Cooled
- 100 amp ACHF or DCSP @ 100%
- 4-1/16" (10.3cm) 5-3/4 oz. (163gm)
- Machine Series Head Accessories (4 Series Collet)

100 Amps

#### MT100 REPLACEMENT PART PAGE LOCATOR:

MT Series Consumables: 58	Torch: 51	Cables: 50	Adapter/Dinse: 39-42, 44
---------------------------	-----------	------------	--------------------------

### MT400 WATER-COOLED

MT400 MACHINE TORCH <i>CK EXCLUSIVE</i>				
HEAD STYLE	CABLE	LENGTH	STANDARD #	SUPERFLEX #
Face Plate Mounted	1 Piece for Dinse Connectors	12½ ft. (3.8m)	MT412-1	MT412SF-1
		25 ft. (7.6m)	MT425-1	MT425SF-1

- Water-Cooled
- 400 amp ACHF or DCSP @ 100%
- 4-1/16" (10.3cm) 6-1/4 oz. (177gm)
- Machine Series Head Accessories (4 Series Collet)

400 Amps

\*90 Degree power cable elbow available - 90EMT300

#### MT400 REPLACEMENT PART PAGE LOCATOR:

MT Series Consumables: 58	Torch: 51	Cables: 50	Adapter/Dinse: 39-42, 44
---------------------------	-----------	------------	--------------------------



Follow us: You Tube



Back To Table of Contents